


Switched PDU 16Amp 230V

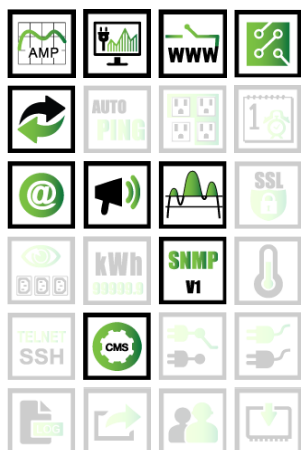

Meter:	True RMS Current Meter
Power Monitor:	Total Power Monitoring by Meter. Web, SNMP, Free Bundle Software
Protocols:	TCPIP, SNMP, DHCP, UDP
Outlet Control:	Individual
Power Delay:	Power on/off sequence can define
Alarm Thresholds:	User-Defined Alarm Thresholds for Warning and Overload
Event Alert:	Email, Trap, Audible Alarm

GENERAL

Output	(21) IEC320 C13 (3) C19
Input	(1) IEC320 C20 inlet; Enclosed IEC320 C19 to C20 power cord, 3 meters long
Protection	(1) 16 Amp Circuit Breaker

COMMUNICATION

DHCP Indication	(1) Green LED
Output Status	(24) Green LED
Network	(1) RJ45 for Ethernet
Current Meter	3 digits seven segment Range: 0A ~ 20A Resolution: 0.1A Precision: +/-2% +/-0.1Amp

OPERATION

Nominal Voltage	230V
Voltage	200V~240V
Frequency	50/60HZ full range
Max. Output Current	16Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	56 x 1245 x 44 mm
Weight	4.6 kg